



.AV Framework™ Base Software for the DMPS3-4K-150-C, DM-MD8X1-4K-C, and HD-MD8X1-4K

Operations Guide
Crestron Electronics, Inc.

Crestron product development software is licensed to Crestron dealers and Crestron Service Providers (CSPs) under a limited non-exclusive, non-transferable Software Development Tools License Agreement. Crestron product operating system software is licensed to Crestron dealers, CSPs, and end-users under a separate End-User License Agreement. Both of these Agreements can be found on the Crestron website at www.crestron.com/legal/software_license_agreement.

The specific patents that cover Crestron products are listed at patents.crestron.com.

Crestron, the Crestron logo, 3-Series, .AV Framework, AirMedia, Cresnet, Crestron Connect It, Crestron Fusion, Crestron Toolbox, DigitalMedia, Fusion RV, RoomView, and SystemBuilder are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. iPad and Macintosh are either trademarks or registered trademarks of Apple, Inc. in the United States and/or other countries. IOS is either a trademark or registered trademark of Cisco Systems, Inc. in the United States and/or other countries. Windows is either a trademark or registered trademark of Microsoft Corporation in the United States and/or other countries. Wi-Fi is either a trademark or registered trademark of Wi-Fi Alliance in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

This document was written by the Technical Publications department at Crestron.
©2015 Crestron Electronics, Inc.

Contents

Introduction	1
Interface Setup	2
TSW-752	2
Crestron App for iPad (CRESTRON-APP-PAD)	6
XPanel.....	8
AM-100.....	8
TT-100	9
MP-B10	10
Fusion RV	14
Connect	14
Control and Monitor	16
System Configuration	17
General	18
Input	19
Output.....	20
Program Setup	21
Main Screen.....	21
Source Selection	22
Signal Routing Behavior	22
.AV Framework Updates	23
Deleting the Program	23
Program Resource Utilization	23

.AV Framework Base Software for the DMPS3-4K-150-C, DM-MD8X1-4K-C, and HD-MD8X1-4K

Introduction

The Crestron® DMPS3-4K-150-C 3-Series® 4K DigitalMedia™ Presentation System, the DM-MD8X1-4K-C 4K Scaling Presentation Switcher, and the HD-MD8X1-4K 4K Scaling Presentation Switcher come with the built-in .AV Framework™ Base program that enables complete system configuration and control.

The latest version of the program and all projects are available on the product web pages for the DMPS3-4K-150-C, the DM-MD8X1-4K-C, and the HD-MD8X1-4K as well as in the firmware upgrade zip file. The zipped package file includes the following:

- The .AV Framework Base program
- The TSW-752 .AV Framework project
- The Xpanel .AV Framework project and installer files for Macintosh® and Windows®
- The iPad® .AV Framework project

In addition to operating with a TSW-752, an iPad, an MP-B10 Media Presentation Button Panel, or XPanel, the program offers direct integration with Crestron Connect It™ devices, such as the TT-100 Presentation Interface, and with AirMedia™.

A special version of the TSW-752 Touch Screen (TSW-752-B-DMPS3 PAK KIT) is available for use with the DMPS3 Series. This version of the touch screen comes with the .AV Framework project preloaded.

NOTE: The DM-MD8X1-4K-C and the HD-MD8X1-4K may optionally be controlled by an external control system rather than be controlled by the built-in .AV Framework functionality. When a control system is added to the IP table, the .AV Framework functionality is disabled.

Many items within this document refer to the DMPS3-4K-150-C, the DM-MD8X1-4K-C, and the HD-MD8X1-4K. For simplicity within this guide, the term “.AV Framework host device” is used except where noted.

Interface Setup

This section provides information on how to connect each interface to the control system.

TSW-752

To connect a TSW-752, use the following procedure:

NOTE: With TSW-752 models other than the TSW-752-B-DMPS3 PAK KIT, the .AV Framework project must be loaded on the touch screen.

NOTE: The .AV Framework Base program requires IP ID 03 from the TSW-752. Out of the box, the value should already be set.


1. On the **Setup** screen, tap **IP Table Setup** to display the **Ethernet Setup – IP Table** screen. The **Ethernet Setup – IP Table** screen displays up to four IP table settings, each of which has an **Online** indicator.

Ethernet Setup – IP Table Screen



2. To add or edit an entry, tap the corresponding **Add/Edit** button. The **Ethernet Setup – Edit IP Table Entry** screen is displayed.


Ethernet Setup – Edit IP Table Entry Screen

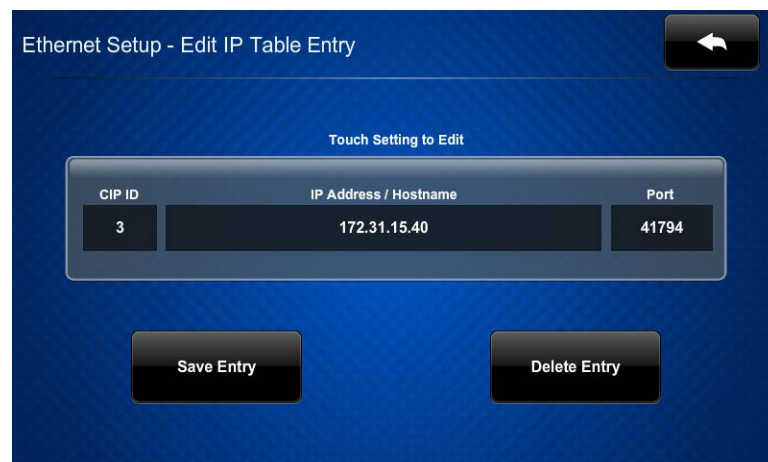

3. Tap the **CIP ID** field to display the on-screen hex keypad.

Edit CIP ID Screen




4. Use the keypad to make the new entry. Tap **Save** to save the new entry or  to return to the **Ethernet Setup – Edit IP Table Entry** screen.
5. Tap the **IP Address/Hostname** field to display the on-screen keyboard.

Edit IP/Host Screen



6. Enter the IP address or hostname of your .AV Framework host device using the on-screen keyboard. Tap **Save** to save the new entry and return to the **Ethernet Setup – Edit IP Table Entry** screen. Tap **Cancel** to return to the **Ethernet Setup – Edit IP Table Entry** screen.
7. On the **Ethernet Setup – Edit IP Table Entry** screen, tap **Save Entry** to save the current entry or **Delete Entry** to clear it.

To pair a TSW-752 via the on-screen interface, use the following procedure:

1. Tap the  (gear) icon to display the **System Configuration** screen.

System Configuration Screen



2. Scroll down the list on the left side of the screen and tap **Touch Screen**.
3. Tap **Pair** to begin the pairing process. The screen will display a message saying to touch the screen of the device to be paired. The TSW-752 screen begins to flash.

Pairing in Process



4. Touch the TSW-752 screen to complete the process.

Pairing Complete



Crestron App for iPad (CRESTRON-APP-PAD)

NOTE: The form at www.crestron.com/crestronmobilesetup should be completed by an authorized Crestron installer if the customer is to configure the device. Upon completion, the instructions in this guide are e-mailed to the customer to provide assistance with the installation and start-up of the app from the device.


NOTE: The iPad .AV Framework project requires the full paid version of the Crestron App for iPad. It will not work with the free version of the app.

To connect with the Crestron App for iPad, use the following procedure:

NOTE: The .AV Framework Base program requires IP ID 04 from this app.

1. On the home screen, tap the Crestron swirl logo to start the app. A list of systems is displayed. When configuring the app for the first time, the screen appears empty.

Home Screen

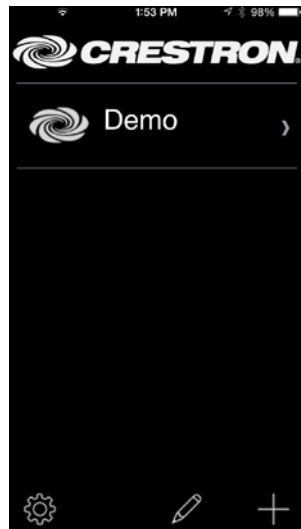

2. Tap + to configure a system. The **Add Location** screen is displayed.

Add Location Screen

3. In the **Address 1 (Typically Local LAN)** section, enter the configuration information for a Wi-Fi® connection.
 - Tap the **Friendly Name / Location** field, and enter the name or location of the .AV Framework host device to be connected. The field is for user reference only and is not a host name.
 - If the iOS® device is to host the project, tap **Use Local Project** until **ON** is displayed. If using the control system to host the project, tap **Use Local Project** until **OFF** is displayed. The .AV Framework host device comes with the iPad project preloaded.
 - Tap the **Host Name or IP Address** field, and enter the host name or IP address of the .AV Framework host device.

NOTE: If using DHCP, enter a host name rather than an IP address, as the DHCP server may change the IP address periodically.

- Tap the **HTTP Port** field. If SSL is enabled, ensure it is set to 443. If SSL is disabled, ensure it is set to 80.
 - Tap the **IP ID** field and ensure it is set to 04.
 - Tap the **CIP** field and ensure it is set to 41794.
4. Tap **Save**. The setup screen is displayed, listing the control system that has been added.


XPanel

To connect with XPanel, use the following procedure:

NOTE: The .AV Framework Base program requires IP ID 05 from XPanel.

1. Install XPanel by running **Crestron XPanel installer.air** (for Macintosh) or **Crestron XPanel installer.exe** (for Windows).
2. Launch the XPanel project by double-clicking **dmps_.avframework_XPanel_vx.x.c3p**. This file can be found in the **Display Files\dmps_.avframework_XPanel_vx.x.c3prj** directory in the .AV Framework package.
3. Access the configuration screen by selecting **Options > Host Settings**.
4. Enter the IP address of the control system and set the IP ID to 05.

Configuration Screen

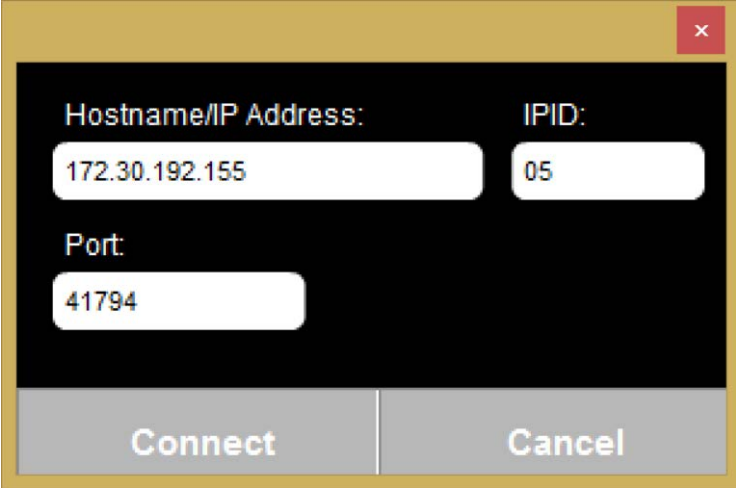A screenshot of the XPanel configuration window. The window has a gold border and a red close button in the top right corner. The background is black. There are three input fields: 'Hostname/IP Address:' with the value '172.30.192.155', 'IPID:' with the value '05', and 'Port:' with the value '41794'. At the bottom, there are two buttons: 'Connect' and 'Cancel'.

AM-100

To connect with an AM-100, use the following procedure:

NOTE: The .AV Framework Base program requires IP ID 20 from the AM-100.

NOTE: The AM-100 must be connected to HDMI Input 4.

1. Use a web browser to connect the device to the AirMedia IP address.
2. Click **Device Administration** to open the login page. The default password is **admin**.
3. After logging in, select **Crestron Services Setup** from the column on the left side of the page.

The screenshot shows the Crestron Services Setup web interface. The sidebar on the left contains the following navigation options: System Status, Device Setup, Network Setup, Crestron Services Setup (highlighted), OSD Setup, SNMP Setup, Device Services, Change Password, Firmware Upgrade, Remote View Setup, Reset to Default, and Reboot System. The main content area is divided into two sections. The 'Crestron Control System' section includes fields for IP Address or Host name (172.30.21.17), IP ID (20), Port (41794), and Communication Status (Online). The 'Crestron Connected™ Device' section includes fields for IP Address or Host name, Communication Status (Offline), Current Source (None), Source (None), Automatic Power On (Immediately), Power Off Time Out (0 minutes), Power Control (Power On/Power Off), Power Status (Unknown), Lamp Hours (0 hours), and Device Status (No Error). There are 'Apply' and 'Cancel' buttons at the bottom right of the main content area.

4. Enter the IP address of the .AV Framework host device. This can be found in the .AV Framework on the **System Configuration** screen (refer to the illustration on page 17).
5. Set the **IP ID** to 20.
6. Set the **Port** to 41794.
7. Click **Apply**.


TT-100

Each TT-100 connects to a USB port on the .AV Framework host device. The TT-100 connected to USB 1 routes to either HDMI 1 or VGA 1 (whichever is in use). The TT-100 units connected to USB 2, USB 3, and USB 4 route to either HDMI or VGA 2, 3, or 4 (whichever is in use).

For more information, refer to “Signal Routing Behavior” on page 22.

MP-B10

To pair an MP-B10 Media Presentation Button Panel with an .AV Framework host device, use a TSW-752, an iPad, or XPanel, and the following procedure:

1. Tap the  (gear) icon to display the **System Configuration** screen.
2. Scroll down the list on the left side of the screen and tap **Button Panel**.

System Configuration Screen




3. Tap **Configure** to access the button panel configuration controls.

Button Panel Configuration



4. Tap **Pair** to begin the pairing process. All the LEDs on the MP-B10 will blink. (On units with older firmware, only one LED will blink.)


Pairing in Process

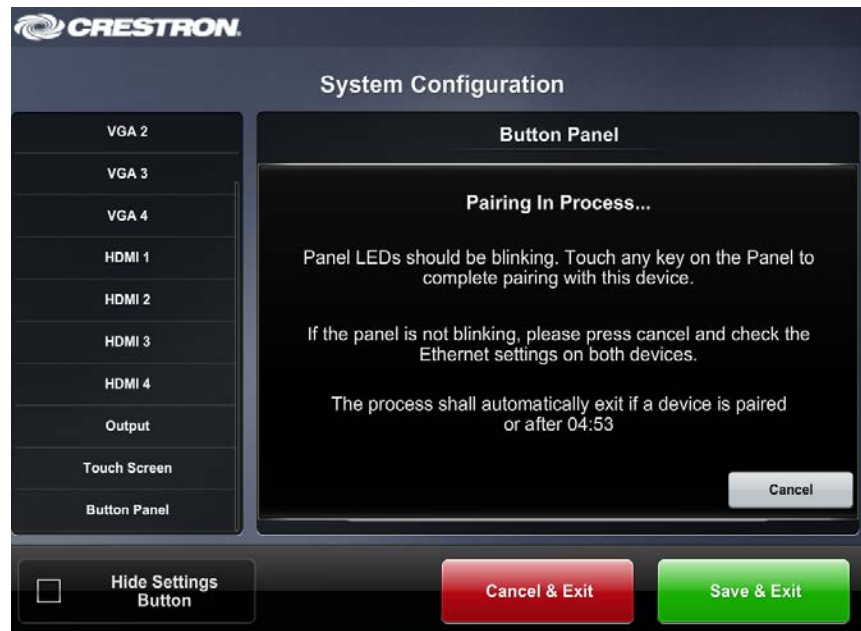

5. Push any button on the MP-B10 to complete the process. The screen will indicate the .AV Framework host device is paired with the MP-B10.


NOTE: On units with older firmware where only one LED is flashing, press the **SETUP** button. (Refer to the MP-B10 documentation for details.)

Pairing Complete

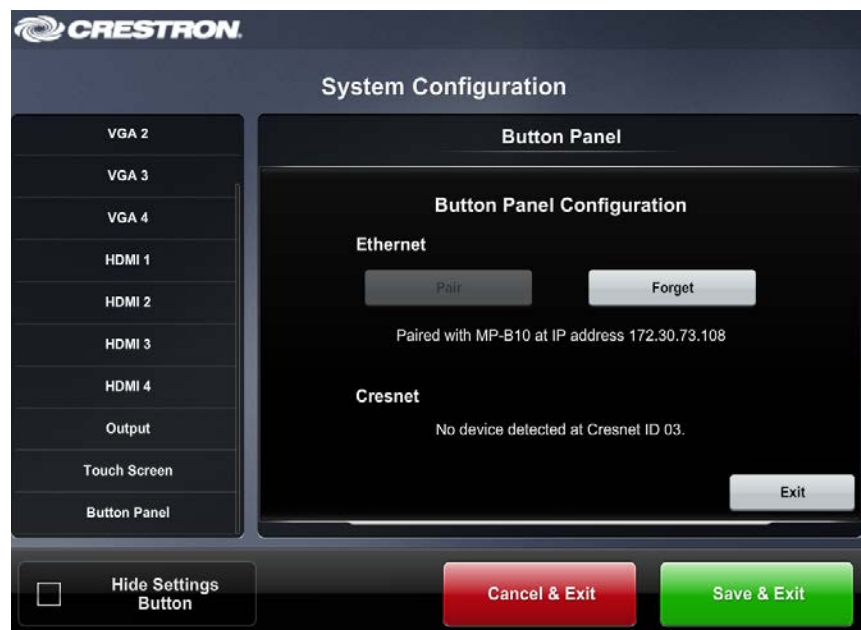


When the MP-B10 is used with a DM-MD8X1-4K-C or an HD-MD8X1-4K, eight buttons are used for routing, one button is used for power, and one button is used for muting audio.

MP-B10 Buttons with a DM-MD-8X1-4K-C

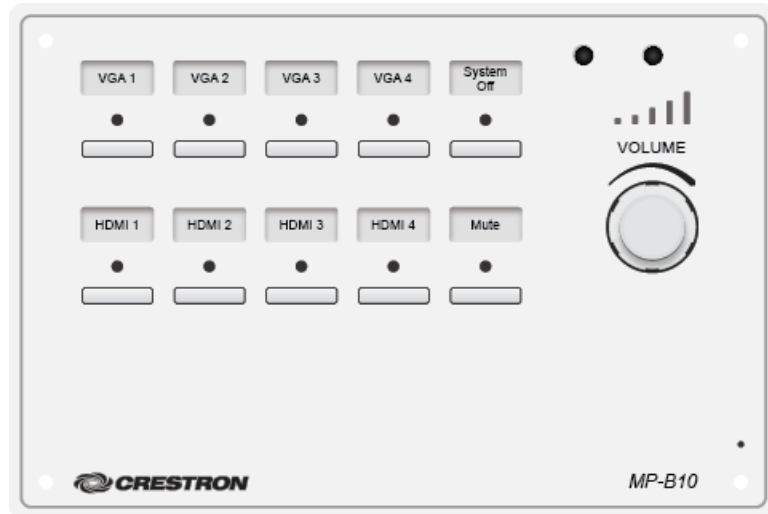

When the MP-B10 is used with a DMPS3-4K-150-C, all ten buttons are used for routing.

MP-B10 Buttons with a DMPS3-4K-150-C

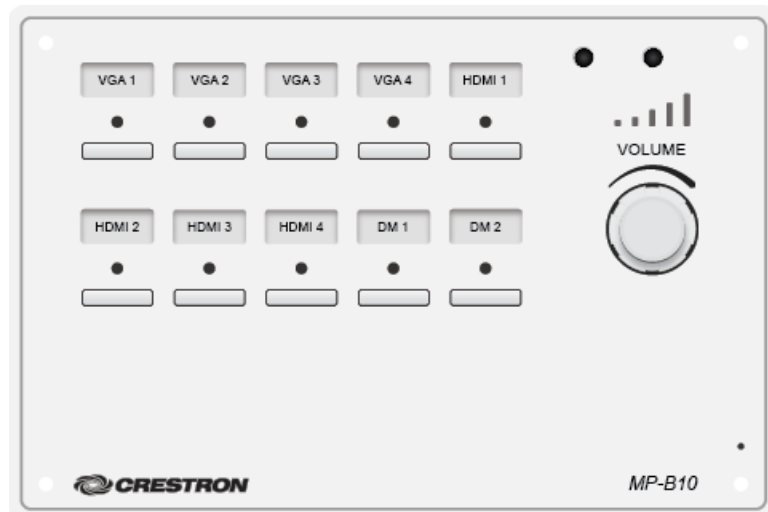


The scroll wheel on the MP-B10 adjusts volume level.


6. Tap **Exit**.

NOTE: An MP-B10 can also be paired directly with a DMPS3-4K-150-C via Cresnet® ID 03. With the direct Cresnet connection between these devices, pairing is automatic.

The MP-B10 configuration interface allows user-assignable button functions. To assign a button, use the following procedure:

1. Tap the  (gear) icon to display the **System Configuration** screen.
2. Scroll down the list on the left side of the screen and tap **Button Panel**.

System Configuration Screen

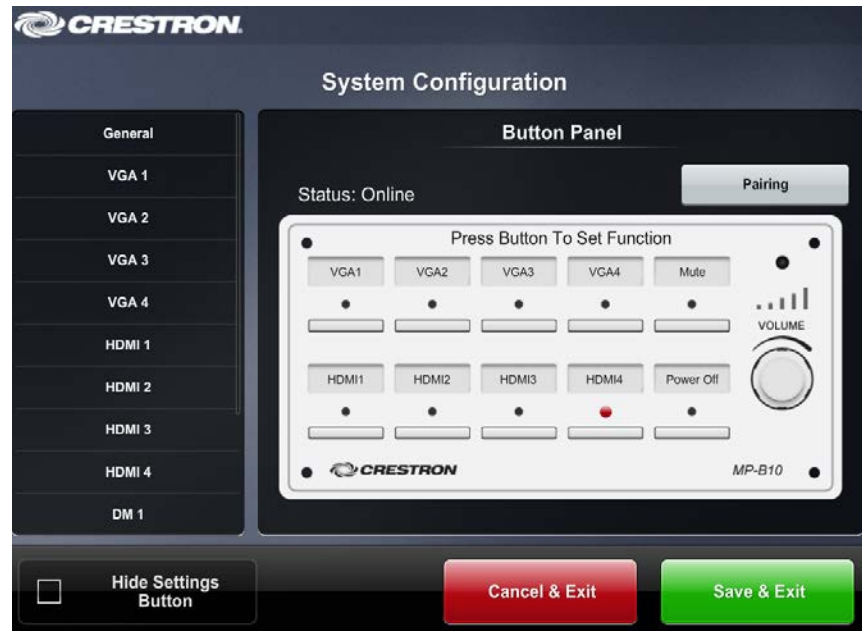

3. Tap the button to be assigned.

System Configuration Screen – Button Assignment



4. Select the desired function by tapping its checkbox, and then tap **Save**.

Fusion RV

Connect

To connect with Fusion RV®, use the following procedure:

NOTE: The .AV Framework Base program requires IP ID F1 from Fusion RV.


- 1. Log in to Crestron Fusion®.
- 2. From the Crestron Fusion header tab, click **Open**.

Crestron Fusion Header Tab



- 3. From the pull-down tab, click **Setup**.

Pull-Down Tab




- 4. Click the + symbol next to the **Root** node to expand the tree. Click the **Rooms** node to expand the tree again.

Root Node




- 5. Click **Add**. From the drop-down list, click **Add Room**. The **Add – Room to Root** dialog box opens.

Add Drop-Down List



Add – Room to Root Dialog Box

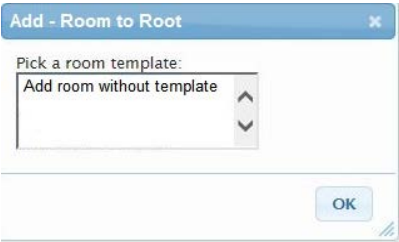

- 6. Click **Add room without template** and then click **OK**. The **Add Room to 'Rooms'** window opens with the **Room Details** tab selected.

Room Details Tab

Add Room to Xosha

Room Details | Scheduling Details | Address | Custom Properties | Processors | Assets | People

Alias: [Lookup Room Name](#)

Name:

Description:

Server Group: Default Group

Location:

Time Zone: UTC-05:00 Eastern Time (US & Canada)

eControl URL: http://

WebCam URL: http://

☒ Inherit Geographic Coordinates

* denotes a required field

[Save & Close](#) [Close](#)

7. Enter information into the required fields as indicated by the red asterisks. Enter optional information as desired.
8. Click the **Scheduling Details** tab.
9. In the **Server Access** field, select **RoomView Calendar** from the drop-down list.

NOTE: The user can change to another scheduling calendar at a later time.

10. Click the **Processors** tab and then click **Add**. The **Add Processor to 'Room'** dialog box opens.

Processors Tab

Room Details | **Scheduling Details** | **Address** | **Custom Properties** | **Processors** | **Assets** | **People**

Click on Add Processor to add a processor with the room. The symbols on the processor will be associated with the room.

+ Add / Edit Delete

<input type="checkbox"/>	Processor Name *	Host Name	Location	Port	Secure Port	Discover Symbols

* denotes a required field

Save & Close Close

Add Processor to 'Room' Dialog Box

Add Processor to Room

Name

Location:

IP Address/Hostname:

Port:

Secure Port:

Username:

Password:

Discover Symbols: ☐

*denotes a required field

Save & Close Close

11. Enter information into the required fields as indicated by the red asterisks. Enter optional information as desired.

NOTE: If the **Discover Symbols** checkbox is selected in the **Add Processor to 'Room'** dialog box and the control program symbol being used is version 7.2 or later, the Symbol Discover feature automatically imports the symbol information into the Crestron Fusion database.

NOTE: In SystemBuilder™, the Symbol Discover feature is not supported on symbols earlier version 7.2.

12. Click **Save & Close** to return to the **Processors** tab.

Control and Monitor

Room monitoring and control in Crestron Fusion use the following attributes:

Controls (Read/Write)

TYPE	FUNCTION
Digital	System On
Digital	System Off
Digital	System Mute Toggle

Monitors (Read Only)

TYPE	FUNCTION
Digital	System Power
Digital	System Muted
Analog	Program Volume Level
Serial	Fusion Error Message
Serial	Fusion Log Text
Serial	Input 1 Source Name
Serial	Input 2 Source Name
Serial	Input 3 Source Name
Serial	Input 4 Source Name
Serial	Input 5 Source Name
Serial	Input 6 Source Name
Serial	Input 7 Source Name
Serial	Input 8 Source Name
Serial	Input 9 Source Name
Serial	Input 10 Source Name

Monitor the assets connected to the system using the following attributes:

Displays 1 through 4 (Read Only)

TYPE	FUNCTION
Digital	Display Power
Digital	Display Online
Digital	Display Offline Timeout Alert


Touch Screen (Read Only)



TYPE	FUNCTION
Digital	Touch Screen Online

System Configuration


Once connected to an .AV Framework host device, prior to setup, the initial screen appears as shown.

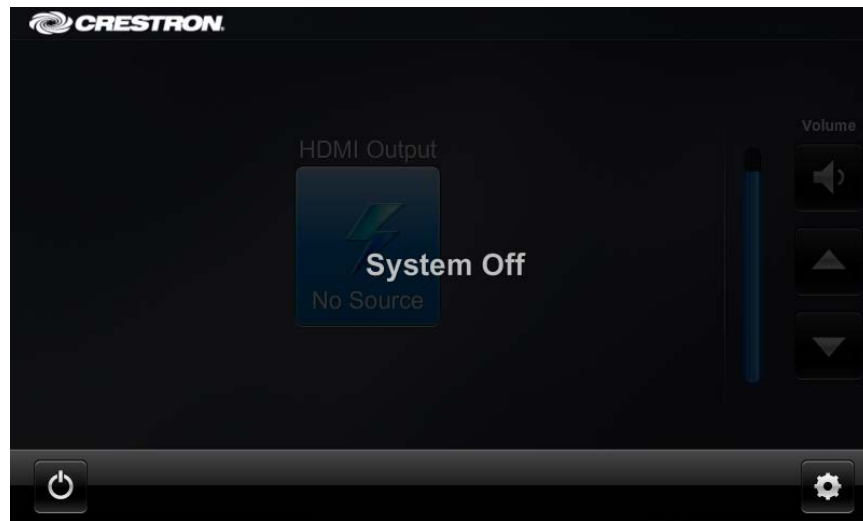Initial Screen



Tap the  (gear) icon to the right of the  (power) button to display the **System Configuration** screen. If the gear icon is not visible on the main screen, touch and hold the bottom right corner of the screen for 10 seconds to display the **System Configuration** screen.

System Configuration Screen

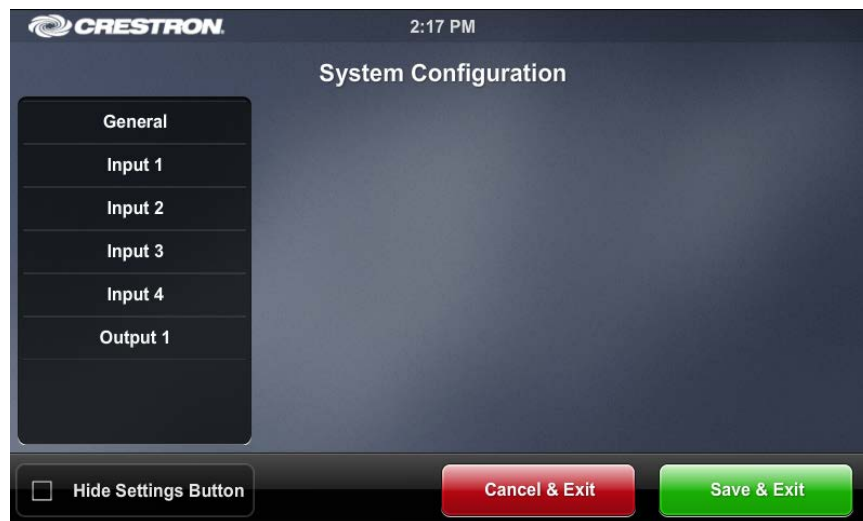

The **System Configuration** screen contains buttons to select specific setup screens. There is a **General** entry, plus an entry for each input and output.

The screen also contains a **Hide Settings Button** checkbox that, when checked, hides the gear icon in the lower right corner of the main screen.

Tap **Cancel & Exit** to return to the main screen without changing any settings. Tap **Save & Exit** to save all changes before returning to the main screen.

General

Tap **General**, and then use the **Name** text box to enter the system name you want to display on the main screen.

NOTE: When the text box is tapped, an on-screen keyboard appears on the bottom of the screen.

System Configuration – General Screen

CRESTRON

System Configuration

General

Name (*maximum number of characters 30)

Presentation System

☐ Auto Mode: Route Automatically When Input Is Detected

☐ Hide Unimplemented Button Messages

Ethernet Information

Hostname: DMPS3-7f45f480

IP Address: 172.30.73.121

Subnet Mask: 255.255.252.0

Default Router: 172.30.72.1

Interface Status

TSW-752

Crestron App

XPanel

AM-100

System Power Timeout

05

☐ Hide Settings Button

Cancel & Exit **Save & Exit**

Input

Tap one of the input buttons to adjust the input's settings.

System Configuration – VGA Input 1 Screen



Use the **Name** text box to enter the input name you want to display on the source selection screen (shown on page 22).

The **Enabled** checkbox determines whether this input is displayed on the source selection screen. By default, the box is checked to enable the display of this input.

Tap the **Icon** button to display the icon selection screen.

Icon Selection Screen



Swipe the array of icons (left or right) to move through the list. Tap an icon to assign it as the icon for the selected input.

Output

Tap **Output 1** to adjust the settings of Output 1.

System Configuration – Output 1 Screen

The screenshot shows the 'System Configuration' screen for 'Output 1'. On the left is a sidebar with a list of settings: HDMI 2, HDMI 3, HDMI 4, DM 1, DM 2, and Output (which is selected). The main area is titled 'Output' and contains two sections. The 'Name' section has a text box labeled 'Name (*maximum number of characters 15)' with the value 'HDMI Output' and a checked checkbox for 'Allow Digital Audio Out'. The 'Display Type' section has a dropdown menu with 'Generic CEC Control' selected, and other options include 'None Selected/Disabled', 'Crestron Connected', and 'NEC MultiSync LED'. At the bottom of the screen are three buttons: 'Hide Settings Button' (with a checkbox), 'Cancel & Exit' (red), and 'Save & Exit' (green).

Use the **Name** text box to enter the output name you want to display on the main screen.

The **Allow Digital Audio Out** checkbox determines whether audio is sent to the display as well as to the analog audio output. By default, the box is not checked, so audio is sent only to the analog audio output.

Use **Display Type** to select the type of display being used.

When a display is selected, the .AV Framework host device sends a power command to turn the display on or off with the system. The Display Power On command is sent when a source is selected. The Power Off command is sent after the system shutdown is confirmed.

NOTE: The power commands are sent via RS-232 using either the output of the “DM Roombox” or the COM A port on the .AV Framework host device. Both outputs are active simultaneously, but to prevent feedback loops, only one at a time can be connected.

Program Setup

Main Screen

The main screen is shown below. Tap the  (power) button to turn on the .AV Framework host device.

Main Screen



The right side of the main screen contains the volume controls and a volume gauge to provide visual indication of the volume setting.



Audio mute toggle (in off position)



Audio mute toggle (in on position)



Volume up control




Volume down control

Source Selection

Tap the output button (in this example, the output button is assigned the name “Projector”) to display the source selection screen.

Source Selection Screen

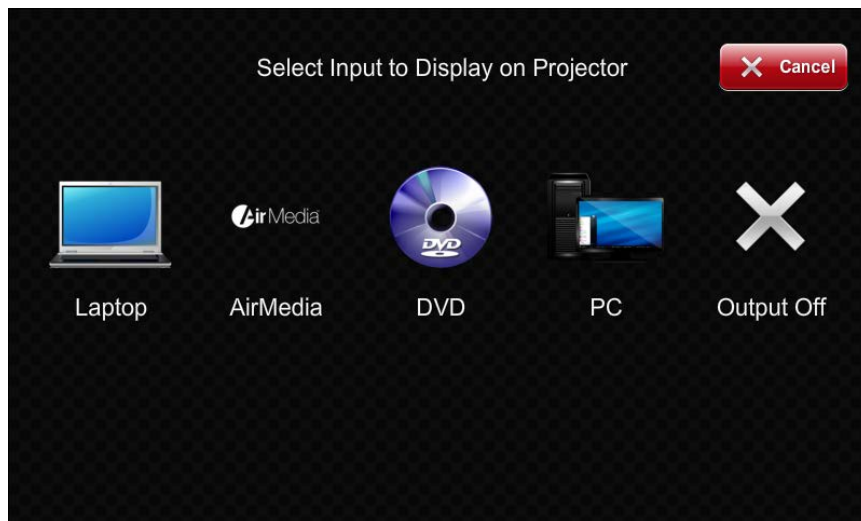

All enabled inputs are shown on this screen. Tap an input to route its video to the output while the associated audio is routed to the analog audio output.

Signal Routing Behavior

The behavior of the .AV Framework Base program's routing feature depends on the components that make up the system. System combinations may include the following products:

- TT-100 Crestron Connect It Presentation Interface
- AM-100 AirMedia Presentation Gateway

NOTE: The AM-100 must be connected to HDMI Input 4.

- TSW-752 7" Touch Screen

Signal routing behavior of the program is as follows:

- If none of the supported peripheral control devices are connected to the system, signals are routed as they are detected by the auto-routing algorithm.
- If TT-100s are in use, the signal is routed when either button on a TT-100 is pressed.
- If an AM-100 is in use in either of the two scenarios above, establishing a connection to the AM-100 will auto-route the AM-100.
- In any of the above scenarios, the system will shut down using the standby timeout.
- If a TSW-752 is connected to the system, the signal is routed to the input selected on the touch screen. System power is controlled by the power buttons on the touch screen.

.AV Framework Updates

The firmware .zip file for the .AV Framework host device includes a copy of the .AV Framework Base program and the iPad project. If the firmware detects an older version of the .AV Framework Base program in slot 1 when the update is applied, it will update the program. If no program is detected, or if a user program is detected, the program update will not be applied.

Deleting the Program

The .AV Framework Base program can be deleted from the .AV Framework host device in the same way any other program can be deleted:

1. In Crestron Toolbox™, select **Tools > System Info**.
2. Connect to the .AV Framework host device.
3. .AV Framework will be in Program 01. Click the ► button. A new dialog box will open.
4. Click **Erase**, and another dialog box will open.
5. In the new dialog box, click **Erase All Program Files**.
6. When the confirmation dialog box opens, click **Yes**.

The program can also be overwritten by a custom user program.

Program Resource Utilization

The following resources are used by the .AV Framework Base program and will not be available to other programs:

- COM 01
- IP ID 03 (TSW-752)
- IP ID 04 (Crestron App)
- IP ID 05 (XPanel)
- IP ID 0B (RoomView® connected display)
- IP ID 0C (RoomView connected display)
- IP ID 0D (RoomView connected display)
- IP ID 0E (RoomView connected display)
- IP ID 10 (MP-B10)
- IP ID 20 (AM-100)
- IP ID F1 (Fusion RV)
- Connect It Device Slot 01
- Connect It Device Slot 02
- Connect It Device Slot 03
- Connect It Device Slot 04

