

LC-XIP2000

Touchboards 1-866-942-6273
205 Westwood Ave, Long Branch, NJ 07740


Ultrawide Interactive XGA LCD Projector 2000 ANSI Lumens

Interactive Presenter Features

- ▼ Interactive function permits real-time annotation of projected image.
- ▼ Pen & pointer function as both writing instruments & computer mouse.
- ▼ Included software for advanced functionality, including screen capture.

Ultrawide Projector Features


- ▼ Extremely Short Throw Lens: as close as a 1:1 Throw-to-Width Ratio
- ▼ 2000 ANSI Lumens, 85% uniformity, and 400:1 contrast ratio.
- ▼ Weighs less than 8 lbs! Compact, low-profile design!
- ▼ 3 panel LCD imaging delivers a rich, color saturated picture.
- ▼ XGA resolution. SXGA-VGA compatible.
- ▼ Smart data compression/expansion, and video scaling.
- ▼ Two HD15 computer inputs, plus one HD15 computer monitor output.
- ▼ Preset image offset. Automatic vertical digital keystone correction.
- ▼ Auto Ceiling adjustment. Auto Brightness adjustment.
- ▼ Accepts Composite, S, and Component Video in all major standards.
- ▼ Displays both 4:3 and 16:9 formats. Supports most HDTV resolutions.
- ▼ Wireless remote control w/Laser. 4X digital zoom. Auto input search.
- ▼ 3 Year* Projector Warranty!

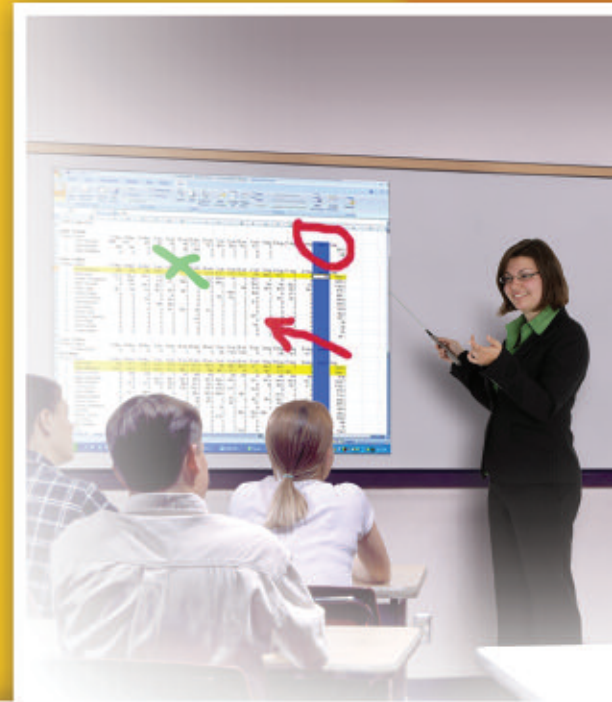

EIKI
Projectors... and more!

LC-XIP2000


2000 ANSI lumens

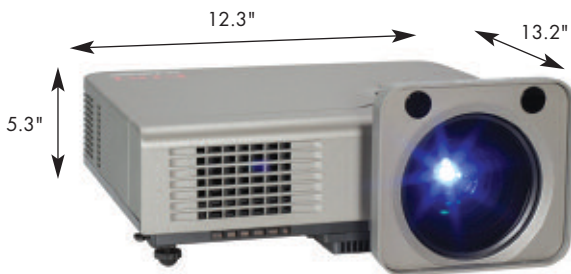

Input Panel



Wireless Remote Control



Pen & Pointer

INCLUDED ACCESSORIES:

Quick Start Guide. Owner's Manual on CD-ROM. AC Power Cord. Computer Input Cable (HD15~HD15). S-Video Input Cable (S-Video~S-Video) Composite Video Input Cable (RCA~RCA) Audio Input Cable (2RCA~Mini Stereo) USB Mouse Cable (USB-A~USB-B) Wireless Remote Control w/Laser Pointer & Batteries (AAA x 2).

OPTIONAL ACCESSORIES:

Replacement Lamp. Carry Bag. Component Video Input Cable (HD15~3-RCA). RS-232C Input Cable (DB9~Mini DIN-8). 15' (5M) USB Extension Cable and AC Adapter, Ceiling Mount. Ceiling Post and Plate. EZ-250 Local Control. NPC-1 Network Control.

Interactive Presenter: Minimum Computer Requirements

Computer: PC only (Interactive Presenter not available for MAC)
 OS: Win 2 K SP4 or Win XP SP2+ and Direct X 9.0
 Computer CPU: Intel Pentium IV
 System RAM: 256 Mb
 Available HD capacity: 30 MB
 Other: CD-ROM, USB-B ver: 2.0

Interactive Presenter: Specifications

Included Accessories: Bag including Pointer, Pen, AA Batteries x 4
 Optional Accessories: 15' (5M) USB Extension Cable and AC Adapter

Interactive Presenter: Operating Range

Image Diagonal: Interactive Projection 50~150 in. (127~381 cm)
 Image Width: Interactive Projection 3.3~10 ft. (1.02~3.1 m)
 Throw Distance (tele-wide): 2.6~19.8 ft. (.08~6.0 m)




Specifications subject to change without notice.

SPECIFICATIONS: LC-XIP2000

| | |
|--|---|
| Brightness | up to 2000 ANSI Lumens |
| Illumination Uniformity | 85% |
| Size of Color Palette | 16.7 Million |
| Contrast Ratio | 400:1 (Full ON/OFF) |
| Projection Lamp | 205 Watt NSH |
| Estimated Lamp Life | up to 2000 Hours of Use |
| Imaging System | 0.63" PolySilicon active matrix TFT Panels x 3 |
| Screen Pixels | 1024 x 768 in stripe configuration |
| Total Pixels | 2,359,296 ((1024 x 768) x 3) |
| Lens Type | Manual Zoom and Focus |
| Lens Specs | Speed: f:1.6~1.88; FL: 0.51~0.61 in. (13.0~15.62 mm) |
| Lens Ratios | Zoom Max:Min: 1.2:1; Throw:Width: 1.0~1.2:1 |
| Image Diagonal: Normal Projection | 40~300 in. (101.6~762 cm) |
| Image Width: Normal Projection | 2.7~20 ft. (0.81~6.1 m) |
| Throw Distance (tele-wide) | 2.6~19.8 ft. (0.79~6.04 m) |
| Front Elevation | Up to 14° Up |
| Anti Keystone | Fixed Image Offset, Ratio (Top:Bottom) 6.5:1 |
| Vertical Keystone Correction | Digital: up to 30° up or down |
| Scanning Frequency | Auto: H Sync. 15-69kHz; V Sync. 43-85Hz |
| Dot Clock | 110 MHz |
| Image Orientation | Normal, Reversed, Inverted |
| Remote Projector Control | Wireless (Infra Red) x 1 |
| RS-232C Control Port | Mini DIN 8 Pin x 1 |
| Computer Native Resolution | 1024 x 768 (XGA) |
| Computer: Compatibility | SXGA, XGA, SVGA, VGA |
| Computer: Formats | 1280x1024 through 640x480 |
| Computer: Higher Resolutions | Displayed panned or Smart Compressed |
| Computer: Lower Resolutions | Displayed normal or Smart Expanded |
| Video Compatibility | NTSC/PAL/SECAM/NTSC 4.43/PAL-M&N |
| Video HD Compatibility | 480i/p, 575i/p, 720p, 1035i, 1080i |
| Formats Supported | Normal 4:3 and Wide Screen 16:9 |
| Video: Image Sizing | Video Scaling Technology |
| Signal Inputs | |
| Computer 1 | HD15 x 1 |
| Computer 2/Component Video (w/optional adapter): | HD15 x 1 |
| S-Video | S-Video x 1 |
| Composite Video | RCA x 1 |
| Audio: | MiniStereo x 1 |
| Outputs | |
| Computer Monitor: | HD15 x 1 |
| Audio (Stereo) - Line: | MiniStereo x 1 |
| Sound System - Amplifier: | 2 Watts (Mono) |
| Sound System - Speaker: | 1.6 x 1.2 in. (4x3 cm) x 1(Ellipse) |
| Fan Noise | as low as 41 dBA |
| Cabinet Size (HxWxD) | 3.8 x 12.2 x 10.6 in. (96 x 310 x 270 mm) |
| Including lens and feet | 5.3 x 12.3 x 13.2 in. (135 x 311 x 334 mm) |
| Weight | 7.7 lb (3.5 kg) |
| Packaged Size (HxWxD) | 9.9 x 17.7 x 13.8 in (250 x 450 x 350 mm) |
| Packaged Weight | 13.7 lb (6.2 kg) |
| Power Requirements | 100-240V AC, 50/60Hz |
| Power Consumption | Up to 250 Watts |
| Heat | up to 853 BTU (215 KC) |
| Power Cord | 6' (1.8M) Type 3, Detachable |
| Safety Compliance | UL, cUL, IEC |
| Security Facilities | Kensington® Security Slot |
| Operating Temperature | 41~95°F (5~35°C) |
| User Maintenance | Clean Air Filter, Replace Lamp |
| Warranty: (to the original end-use customer) | |
| Projector: | 3 Years/6000 Hour Use*(Parts & Labor to Correct Defects) |
| Lamp: | 90 Days (Failed Lamp Replaced Pro-Rata * Whichever occurs first) |

Talk to your EIKI Dealer... the "pro" in projectors.



Touchboards 1-866-942-6273
 205 Westwood Ave, Long Branch, NJ 07740