



for a greener tomorrow



MULTIMEDIA DATA/VIDEO PROJECTORS

Distinctly Superior Imaging Capabilities

All-new series of high-brightness installation models
with advanced color reproduction performance



UD8900U

UD8850U

WD8700U

XD8600U

UD8900U(BL)

UD8850U(BL)

WD8700U(BL)

XD8600U(BL)



Introducing an Evolutionary Line-up of Advanced Installation Models

Vivid image and color reproduction for truly unforgettable presentations

High picture quality, functionality and reliability... The new 8000 Series of installation-model projectors from Mitsubishi Electric utilize advanced color reproduction technologies to create images that ensure maximum impact from your presentations. Aiming to reproduce true-to-life images, exhaustive measures have been taken to achieve precise color reproduction in addition to high brightness and high contrast. Projectors are easy to install and require minimal maintenance, further contributing to the superior reliability synonymous with the Mitsubishi Electric name. The new line-up offers a choice of four models from standard to high-resolution, all of which are sure to transform your presentations into unforgettable experiences.

High Image Quality

Vivid Color 8500lm* Brightness and 2800:1 High Contrast

Features including impressive 8500lm brightness and a high contrast of 2800:1 allow the XD8600U to reproduce clear, sharp images regardless of venue size, be it a large meeting room or lecture hall. Whether coming from a computer, or other video source, the reproduction of vivid images full of color is guaranteed.

*Maximum brightness of UD8900U, UD8850U is 7500 lumens.
WD8700U is 7300 lumens.



Contrast 1000:1



Contrast 2800:1

Optional Color Wheel with High Color Brightness

In addition to the standard red (R)/green (G)/blue (B)/white (W) four-segment color wheel, an optional three-segment (R/G/B) color wheel is available. Compared to the standard color wheel, it reproduces each primary color (R/G/B) with high brightness and in vivid, deep tones, making it possible to project visuals rich with color.

*White brightness is reduced when the optional color wheel is used.



Standard color wheel



Optional color wheel




Standard color wheel

Optional color wheel

High Reliability

The dual lamp system and lamp relay function enable continuous operation with no risk of the image going out. Dust resistance and cooling performance are greatly enhanced by the automated self-cleaning filter and heat-pipe cooling system technologies that have proven so successful in air conditioners, enabling extended continuous use for monitoring and digital signage applications.

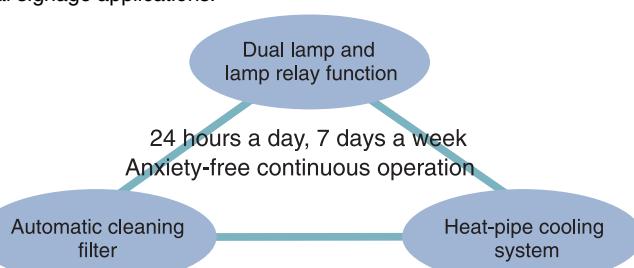

Various Lamp Relay Options

Continuous, bright projection is ensured through the utilization of a dual-lamp light source and a variety of setting options. When two lamps are in use, one of the lamps can be rested (turned off) once a day or week. Additionally, if only one lamp is being used and it goes out, an automatic back-up function activates the other lamp, enabling nonstop projection.






UD8900U **UD8900U(BL)**
UD8850U **UD8850U(BL)**
WD8700U **WD8700U(BL)**
XD8600U **XD8600U(BL)**

Super Resolution

These projectors are equipped with Mitsubishi Electric's industry leading, advanced image-processing algorithm, which is also used in our televisions and displays. The technology analyzes blurred components in the original images, estimates high-resolution data not provided in the original signal and corrects the image quality. The result is the projection of sharp, vivid images such as people's faces in fine detail.

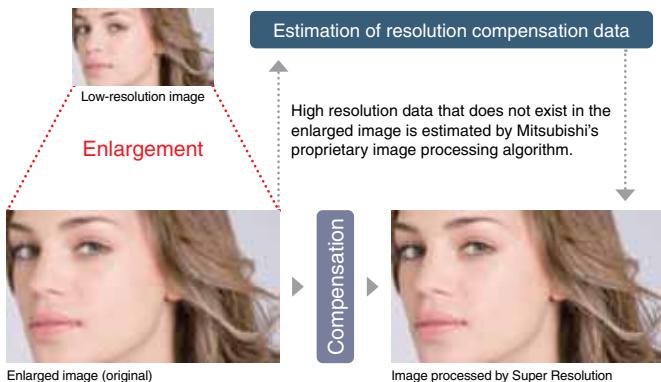

New Natural Color Matrix

This color balancing function enables more precise control by allowing each color to be adjusted independently. Conventional R/G/B/cyan (C)/magenta (M)/ yellow (Y) six-axis color gradation correction has been refined to include intermediate colors, resulting in 12-axis* correction.
*Automatic projector-based correction in conjunction with conventional R/G/B/C/M/Y six-axis manual correction and intermediate-color six-axis manual correction.

Dynamic Contrast Correction

The 8000 series analyzes the image signal, detects the screen brightness distribution of each scene and then automatically corrects the signal in real-time to enhance contrast. This suppresses the loss of shadow details in dark scenes and highlight details in bright scenes, producing clear, dynamic images.



The trees in the middle of the screen have a sharply defined outline, producing a distinct sense of depth.

Automatic Cleaning Filter

For the 8000 Series, we've utilized the same mechanism (mesh filter and cleaning brush) that has a proven track record in Mitsubishi Electric air conditioners and air purifiers is utilized. It automatically prevents dust from building up in the radiator of the heat-pipe cooling unit for the digital micromirror device (DMD), thereby ensuring trouble-free use for extended periods of time.

Heat-pipe Cooling System

Compared to liquid-based cooling systems, this heat-pipe cooling system has a simplified structure and does not require a power supply, enabling a more compact design and cost reductions. Not only is it highly reliable, other benefits include exceptional energy savings, quiet operation and elimination of concerns regarding liquid leaking.

Installation Flexibility


Geometric Corrections

Keystone Correction

Trapezoidal distortion caused when the projector is not positioned directly in front of the screen is corrected in both vertical and horizontal directions.

Cornerstone Correction

Pixel conversion is used to correct trapezoidal and diagonal distortion that causes oblique images, ensuring the proper aspect ratio.

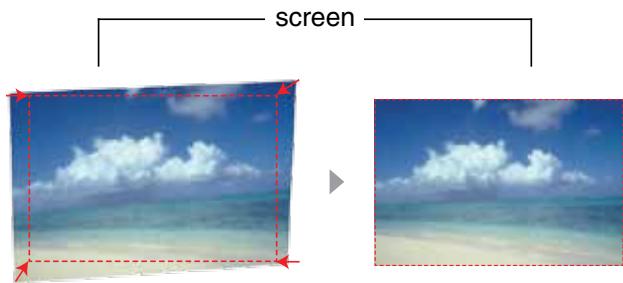

Curved-surface Projection Correction

Projectors in the series are equipped with a distortion correction function that can be used when projecting images onto curved surfaces. Coordinates at the image's four corners are adjusted, enabling the projection angle to be adjusted at the time of angled or stacked projection. It is extremely handy for unique applications like projecting images onto special surfaces such as pillars at event sites.



Ultra-short-throw Optional Lens

(OL-XD8000EZ)

The newly introduced OL-XD8000EZ lens enables a projection distance as short as 0.6~0.8m.* Large images with high picture quality can be enjoyed even in small rooms where it's not possible to secure a standard projection distance.


*For a 40-inch projection screen (XD8600U only).



Multi-screen Solutions


Edge Blending

Edge blending creates a seamless image by adjusting the brightness at adjoining edges when using multiple projectors side-by-side to reproduce single widescreen images. This feature can also be utilized for top-bottom projection or a combination of side-by-side and top-bottom images; for example, when images are projected from four projectors in a two-by-two arrangement.

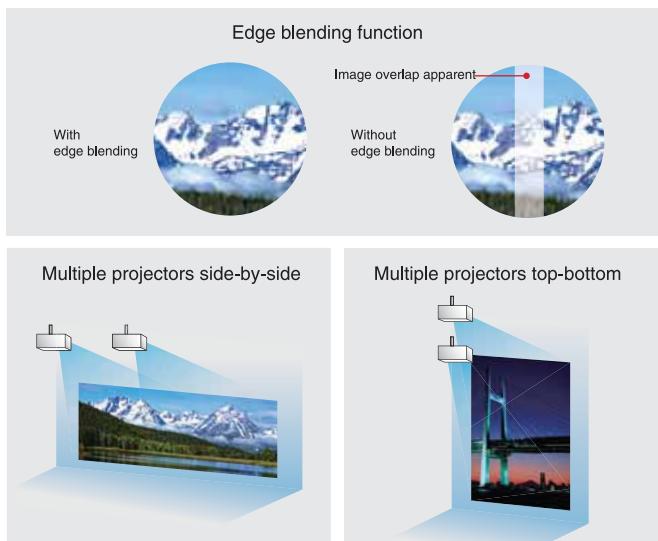

Color Matching

The use of multiple projectors to create a larger image can result in color variations due to slight differences in projector image processing. The 8000 series projectors are equipped with a color matching function that resolves this problem. Each projector is adjusted so that the same colors are reproduced when multiple projectors are used simultaneously.

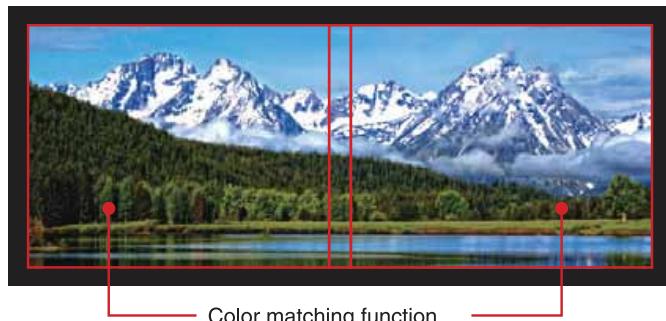

Optional Lenses

OL-XD2000SZ
Short-throw Zoom Lens



Converter Lens
(mounted on the standard lens)

OL-XD2000LZ
Long-throw Zoom Lens



OL-XD2000TZ
Telescopic-throw
Zoom Lens



OL-XD8000UZ
Ultra-telescopic-throw
Zoom Lens



OL-XD8000EZ
Ultra Short-throw Lens



OL-XD2000FR
Rear-projection
Short-throw Fixed Lens



Others


Ecology

Long 4000hrs Lamp Life

Designed with a lamp temperature controlling system, the 8000 series can support an estimated lamp rating of up to 4000 hours. The long estimated lamp life makes dramatic reductions in overall cost of ownership by decreasing the frequency of lamp replacements.



Lamp Life Comparison

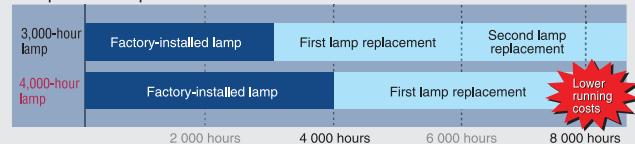

Lamp life specification is an estimate based on verification under proper conditions and is not the duration of the warranty. Lamp will shut-off automatically when usage reaches the specified estimated maximum lamp hours. Service life may vary widely depending on usage and operating environment and conditions, as well as users' adherence to the maintenance and cleaning procedures provided in the user manual.

Stand-by Wattage under 0.3W*

Stand-by (low) mode power consumption is less than 0.3W, offering increased energy savings and further contributing to environmental preservation.

*When in stand-by (low) mode. At this time, use of the LAN function, serial output and Remote 1 is not possible.

Network

Network Connectivity

Projectors are equipped with a RJ-45 LAN terminal for remote operation. Additionally, when used with Crestron RoomView™, integrated control of up to 250 projectors including power on/off control, message display and confirmation of lamp service hours is possible. The 8000 series are equipped with AMX Device Discovery for simplified device management and compatible with PJLink™.

*The trademark of PJLink is trademark applied for registration or registered trademark in Japan, the United States, and other countries and areas.



Multiple Terminals

Many different interfaces are possible thanks to a variety of terminals including 3G-SDI (UD8900U only), DVI-D (HDCP), HDMI and 5BNC. A control terminal (compatible with RS-232C) is also provided for easier system integration.

Others

OSD Menu Multilanguage Compatibility (20 Languages*)

*Previous languages: Chinese, English, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish

Languages added: Dutch, Indonesian, Malaysian, Norwegian, Thai, Turkish, Vietnamese, Arabic

2-Screen Mode

PinP: XD8600U Split: WD8700U, UD8900U, UD8850U)

Direct Power Off

Test Pattern

Demonstration Mode

In demonstration mode, the image on the screen is split and the effects of the following features are shown on the right side.

- 1: Super Resolution
- 2: Natural Color Matrix
- 3: Dynamic Contrast Correction

User Friendly

Ultra Quiet 35dB Operation

Fan noise during projector operation can be distracting during a presentation or videoconference. The 8000 series projectors operate at a significantly low noise level of only 35dB (i.e., using a dual lamp in "low lamp" mode). As a result, presentations and conferences can be held without distracting projector noise in the background.


Examples of Noise Levels

- 20dB : Rustling leaves, the ticking of a wall clock (from 1m in front)
- 30dB : A whisper, a suburban area very late at night
- 40dB : A quiet neighborhood, small birds chirping

35dB

360° Projection Capability

Images can be projected over a full 360° range along the vertical axis* including reproduction on the ceiling or floor. The application possibilities are limitless.



*Excluding use in high-altitude mode.

ID-compatible Remote Control

ID settings for up to 63 projectors are possible. Setting the IDs allows control of each individual projector when multiple projectors are installed.

Power Zoom/Focus and Lens Shift

The zoom/focus and lens shift adjustment are powered by an electric motor, ensuring easy operation.

Mechanical Shutter

An internal shutter in the projector enables light to be completely blocked when the projector is in Mute mode.



Lamp Side Access

The lamps can be accessed from the side of the unit.

Cable Lock

Reliability has been improved by introducing a cable locking function that prevents the AC power cord from becoming disconnected accidentally.

High-altitude Mode (2,000 to 2,700m)

Adjusts fan speed and other necessary settings to ensure proper projector operation even in high altitude environments.

Closed Caption Support

A closed caption decoder comes installed as standard equipment. Words spoken are processed into subtitles that are projected onto the screen. This feature conveniently addresses the needs of language students and hearing-impaired viewers.



UD8900U / UD8850U

Standard Lens (Aspect 16:10)

Image (WUXGA)			Distance from Screen		Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position					
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	m	inch	H1	H2	H1	H2	W1	W1	W1	W1	
40	102	34	86	21	54	55	1.4	76	1.9	0	0	10 ← 0 → 4	26 ← 0 → 10	3 ← 0 → 3	8 ← 0 → 8
60	152	51	129	32	81	83	2.1	115	2.9	0	0	15 ← 0 → 6	39 ← 0 → 15	5 ← 0 → 5	12 ← 0 → 12
80	203	68	172	42	108	112	2.8	154	3.9	0	0	21 ← 0 → 8	52 ← 0 → 20	7 ← 0 → 7	17 ← 0 → 17
100	254	85	215	53	135	141	3.6	193	4.9	0	0	26 ← 0 → 10	66 ← 0 → 25	8 ← 0 → 8	21 ← 0 → 21
150	381	127	323	79	202	213	5.4	291	7.4	0	0	39 ← 0 → 15	98 ← 0 → 37	12 ← 0 → 12	31 ← 0 → 31
200	508	170	431	106	269	285	7.2	389	9.9	0	0	52 ← 0 → 20	131 ← 0 → 50	16 ← 0 → 16	42 ← 0 → 42
250	635	212	538	132	337	356	9.1	-	-	0	0	65 ← 0 → 24	164 ← 0 → 62	20 ← 0 → 20	52 ← 0 → 52
300	762	254	646	159	404	428	10.9	-	-	0	0	77 ← 0 → 29	197 ← 0 → 75	25 ← 0 → 25	62 ← 0 → 62

OL-XD2000SZ (Aspect 16:10)

Image (WUXGA)			Distance from Screen		Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position					
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	m	inch	H1	H2	H1	H2	W1	W1	W1	W1	
40	102	34	86	21	54	42	1.1	59	1.5	0	0	10 ← 0 → 4	26 ← 0 → 10	3 ← 0 → 3	8 ← 0 → 8
60	152	51	129	32	81	85	1.6	90	2.3	0	0	15 ← 0 → 6	39 ← 0 → 15	5 ← 0 → 5	12 ← 0 → 12
80	203	68	172	42	108	87	2.2	121	3.1	0	0	21 ← 0 → 8	52 ← 0 → 20	7 ← 0 → 7	17 ← 0 → 17
100	254	85	215	53	135	110	2.8	152	3.9	0	0	26 ← 0 → 10	66 ← 0 → 25	8 ← 0 → 8	21 ← 0 → 21
150	381	127	323	79	202	217	4.2	229	5.8	0	0	39 ← 0 → 15	98 ← 0 → 37	12 ← 0 → 12	31 ← 0 → 31
200	508	170	431	106	269	224	5.7	307	7.8	0	0	52 ← 0 → 20	131 ← 0 → 50	16 ← 0 → 16	42 ← 0 → 42
250	635	212	538	132	337	381	7.1	-	-	0	0	65 ← 0 → 24	164 ← 0 → 62	20 ← 0 → 20	52 ← 0 → 52
300	762	254	646	159	404	438	8.6	-	-	0	0	77 ← 0 → 29	197 ← 0 → 75	25 ← 0 → 25	62 ← 0 → 62

OL-XD2000LZ (Aspect 16:10)

Image (WUXGA)			Distance from Screen		Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position					
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	m	inch	H1	H2	H1	H2	W1	W1	W1	W1	
40	102	34	86	21	54	-	-	89	2.3	0	0	10 ← 0 → 4	26 ← 0 → 10	3 ← 0 → 3	8 ← 0 → 8
60	152	51	129	32	81	87	2.7	137	3.5	0	0	15 ← 0 → 6	39 ← 0 → 15	5 ← 0 → 5	12 ← 0 → 12
80	203	68	172	42	108	146	3.7	185	4.7	0	0	21 ← 0 → 8	52 ← 0 → 20	7 ← 0 → 7	17 ← 0 → 17
100	254	85	215	53	135	184	4.7	233	5.9	0	0	26 ← 0 → 10	66 ← 0 → 25	8 ← 0 → 8	21 ← 0 → 21
150	381	127	323	79	202	279	7.1	353	9.0	0	0	39 ← 0 → 15	98 ← 0 → 37	12 ← 0 → 12	31 ← 0 → 31
200	508	170	431	106	269	374	9.5	473	12.0	0	0	52 ← 0 → 20	131 ← 0 → 50	16 ← 0 → 16	42 ← 0 → 42
250	635	212	538	132	337	470	11.9	592	15.0	0	0	65 ← 0 → 24	164 ← 0 → 62	20 ← 0 → 20	52 ← 0 → 52
300	762	254	646	159	404	716	18.2	1167	29.6	0	0	77 ← 0 → 29	197 ← 0 → 75	25 ← 0 → 25	62 ← 0 → 62

OL-XD2000TZ (Aspect 16:10)

Image (WUXGA)			Distance from Screen		Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position					
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	m	inch	H1	H2	H1	H2	W1	W1	W1	W1	
40	102	34	86	21	54	-	-	151	3.8	0	0	10 ← 0 → 4	26 ← 0 → 10	3 ← 0 → 3	8 ← 0 → 8
60	152	51	129	32	81	139	3.5	229	5.8	0	0	15 ← 0 → 6	39 ← 0 → 15	5 ← 0 → 5	12 ← 0 → 12
80	203	68	172	42	108	187	4.8	308	7.8	0	0	21 ← 0 → 8	52 ← 0 → 20	7 ← 0 → 7	17 ← 0 → 17
100	254	85	215	53	135	235	6.0	386	9.8	0	0	26 ← 0 → 10	66 ← 0 → 25	8 ← 0 → 8	21 ← 0 → 21
150	381	127	323	79	202	355	9.0	581	14.8	0	0	39 ← 0 → 15	98 ← 0 → 37	12 ← 0 → 12	31 ← 0 → 31
200	508	170	431	106	269	475	12.1	776	19.7	0	0	52 ← 0 → 20	131 ← 0 → 50	16 ← 0 → 16	42 ← 0 → 42
250	635	212	538	132	337	595	15.1	792	24.7	0	0	65 ← 0 → 24	164 ← 0 → 62	20 ← 0 → 20	52 ← 0 → 52
300	762	254	646	159	404	716	18.2	1167	29.6	0	0	77 ← 0 → 29	197 ← 0 → 75	25 ← 0 → 25	62 ← 0 → 62

OL-XD8000UZ (Aspect 16:10)

Image (WUXGA)			Distance from Screen		Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position					
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	m	inch	H1	H2	H1	H2	W1	W1	W1	W1	
40	102	34	86	21	54	25	0.6	32	0.8	0	0	10 ← 0 → 4	26 ← 0 → 10	3 ← 0 → 3	8 ← 0 → 8
60	152	51	129	32	81	99	1.4	151	2.0	0	0	15 ← 0 → 6	39 ← 0 → 15	5 ← 0 → 5	12 ← 0 → 12
80	203	68	172	42	108	187	3.7	218	5.4	0	0	21 ← 0 → 8	52 ← 0 → 20	7 ← 0 → 7	17 ← 0 → 17
100	254	85	215	53	135	384	9.8	740	18.8	0	0	26 ← 0 → 10	66 ← 0 → 25	8 ← 0 → 8	21 ← 0 → 21
150	381	127	323	79	202	573	14.5	1107	28.1	0	0	39 ← 0 → 15	98 ← 0 → 37	12 ← 0 → 12	31 ← 0 → 31
200	508	170	431	106	269	761	19.3	1473	37.4	0	0	52 ← 0 → 20	131 ← 0 → 50	16 ← 0 → 16	42 ← 0 → 42
250	635	212	538	132	337	959	24.1	-	-	0	0	65 ← 0 → 24	164 ← 0 → 62	20 ← 0 → 20	52 ← 0 → 52
300	762	254	646	159	404	1138	28.9	-	-	0	0	77 ← 0 → 29	197 ← 0 → 75	25 ← 0 → 25	62 ← 0 → 62

OL-XD2000EZ (Aspect 16:10)

Image (WUXGA)			Distance from Screen		Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position					
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	m	inch	H1	H2	H1	H2	W1	W1	W1	W1	
40	102	34	86	21	54	25	0.6	32	0.8	0	0	10 ← 0 → 4	26 ← 0 → 10	3 ← 0 → 3	8 ← 0 → 8
60	152	51	129	32	81	99	1.4	151	2.0	0	0	15 ← 0 → 6	39 ← 0 → 15	5 ← 0 → 5	12 ← 0 → 12
80	203	68	172	42	108	187	3.7	218	5.4	0	0	21 ← 0 → 8	52 ← 0 → 20	7 ← 0 → 7	17 ← 0 → 17
100	254	85	215	53	135	384	9.8	740	18.8	0	0	26 ← 0 → 10	66 ← 0 → 25	8 ← 0 → 8	21 ← 0 → 21
150	381	127	323	79	202	573	14.5	1107	28.1	0	0	39 ← 0 → 15	98 ← 0 → 37	12 ← 0 → 12	31 ← 0 → 31
200	508	170	431	106	269	131	3.3	165	4.2	0	0	52 ← 0 → 20	131 ← 0 → 50	16 ← 0 → 16	42 ← 0 → 42
250	635	212	538	132	337	165	4.2	206	5.2	0	0	6			

WD8700U

Standard Lens (Aspect 16:10)

Image (WXGA)			Distance from Screen				Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position			
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	inches	m	H1	H2	H1	H2	W1	W1	W1	W1	
inch	cm	inch	cm	inch	m	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm
40	102	34	86	21	54	58	1.5	80	2.0	0	0	10 ← 0 → 5	25 ← 0 → 12	3 ← 0 → 3	9 ← 0 → 9
60	152	51	129	32	81	88	2.2	121	3.1	0	0	15 ← 0 → 7	37 ← 0 → 17	5 ← 0 → 5	13 ← 0 → 13
80	203	68	172	42	108	118	3.0	162	4.1	0	0	19 ← 0 → 9	49 ← 0 → 23	7 ← 0 → 7	17 ← 0 → 17
100	254	85	215	53	135	148	3.8	203	5.2	0	0	24 ← 0 → 11	62 ← 0 → 29	9 ← 0 → 9	22 ← 0 → 22
150	381	127	323	79	202	224	5.7	306	7.8	0	0	36 ← 0 → 17	92 ← 0 → 43	13 ← 0 → 13	33 ← 0 → 33
200	508	170	431	106	269	299	7.6	408	10.4	0	0	49 ← 0 → 23	123 ← 0 → 58	17 ← 0 → 17	44 ← 0 → 44
250	635	212	538	132	337	337	9.5	-	-	0	0	61 ← 0 → 28	154 ← 0 → 72	21 ← 0 → 21	55 ← 0 → 55
300	762	254	646	159	404	450	11.4	-	-	0	0	73 ← 0 → 34	185 ← 0 → 86	26 ← 0 → 26	65 ← 0 → 65

OL-XD2000SZ (Aspect 16:10)

Image (WXGA)			Distance from Screen				Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position			
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	inches	m	H1	H2	H1	H2	W1	W1	W1	W1	
inch	cm	inch	cm	inch	m	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm
40	102	34	86	21	54	44	1.1	62	1.6	0	0	10 ← 0 → 5	25 ← 0 → 12	3 ← 0 → 3	9 ← 0 → 9
60	152	51	129	32	81	88	1.7	94	2.4	0	0	15 ← 0 → 7	37 ← 0 → 17	5 ← 0 → 5	13 ← 0 → 13
80	203	68	172	42	108	92	2.3	127	3.2	0	0	19 ← 0 → 9	49 ← 0 → 23	7 ← 0 → 7	17 ← 0 → 17
100	254	85	215	53	135	116	3.0	160	4.1	0	0	24 ← 0 → 11	62 ← 0 → 29	9 ← 0 → 9	22 ← 0 → 22
150	381	127	323	79	202	176	4.5	241	6.1	0	0	36 ← 0 → 17	92 ← 0 → 43	13 ← 0 → 13	33 ← 0 → 33
200	508	170	431	106	269	236	6.0	323	8.2	0	0	49 ← 0 → 23	123 ← 0 → 58	17 ← 0 → 17	44 ← 0 → 44
250	635	212	538	132	337	337	7.5	-	-	0	0	61 ← 0 → 28	154 ← 0 → 72	21 ← 0 → 21	55 ← 0 → 55
300	762	254	646	159	404	456	9.0	-	-	0	0	73 ← 0 → 34	185 ← 0 → 86	26 ← 0 → 26	65 ← 0 → 65

OL-XD2000LZ (Aspect 16:10)

Image (WXGA)			Distance from Screen				Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position			
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	inches	m	H1	H2	H1	H2	W1	W1	W1	W1	
inch	cm	inch	cm	inch	m	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm
40	102	34	86	21	54	44	1.1	62	1.6	0	0	10 ← 0 → 5	25 ← 0 → 12	3 ← 0 → 3	9 ← 0 → 9
60	152	51	129	32	81	88	1.7	94	2.4	0	0	15 ← 0 → 7	37 ← 0 → 17	5 ← 0 → 5	13 ← 0 → 13
80	203	68	172	42	108	92	2.3	127	3.2	0	0	19 ← 0 → 9	49 ← 0 → 23	7 ← 0 → 7	17 ← 0 → 17
100	254	85	215	53	135	116	3.0	160	4.1	0	0	24 ← 0 → 11	62 ← 0 → 29	9 ← 0 → 9	22 ← 0 → 22
150	381	127	323	79	202	176	4.5	241	6.1	0	0	36 ← 0 → 17	92 ← 0 → 43	13 ← 0 → 13	33 ← 0 → 33
200	508	170	431	106	269	236	6.0	323	8.2	0	0	49 ← 0 → 23	123 ← 0 → 58	17 ← 0 → 17	44 ← 0 → 44
250	635	212	538	132	337	337	7.5	-	-	0	0	61 ← 0 → 28	154 ← 0 → 72	21 ← 0 → 21	55 ← 0 → 55
300	762	254	646	159	404	456	9.0	-	-	0	0	73 ← 0 → 34	185 ← 0 → 86	26 ← 0 → 26	65 ← 0 → 65

OL-XD2000FR (Aspect 16:10)

Image (WXGA)			Distance from Screen				Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position			
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	inches	m	H1	H2	H1	H2	W1	W1	W1	W1	
inch	cm	inch	cm	inch	m	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm
40	102	34	86	21	54	44	1.1	62	1.6	0	0	10 ← 0 → 5	25 ← 0 → 12	3 ← 0 → 3	9 ← 0 → 9
60	152	51	129	32	81	88	1.7	94	2.4	0	0	15 ← 0 → 7	37 ← 0 → 17	5 ← 0 → 5	13 ← 0 → 13
80	203	68	172	42	108	92	2.3	127	3.2	0	0	19 ← 0 → 9	49 ← 0 → 23	7 ← 0 → 7	17 ← 0 → 17
100	254	85	215	53	135	116	3.0	160	4.1	0	0	24 ← 0 → 11	62 ← 0 → 29	9 ← 0 → 9	22 ← 0 → 22
150	381	127	323	79	202	176	4.5	241	6.1	0	0	36 ← 0 → 17	92 ← 0 → 43	13 ← 0 → 13	33 ← 0 → 33
200	508	170	431	106	269	236	6.0	323	8.2	0	0	49 ← 0 → 23	123 ← 0 → 58	17 ← 0 → 17	44 ← 0 → 44
250	635	212	538	132	337	337	7.5	-	-	0	0	61 ← 0 → 28	154 ← 0 → 72	21 ← 0 → 21	55 ← 0 → 55
300	762	254	646	159	404	456	9.0	-	-	0	0	73 ← 0 → 34	185 ← 0 → 86	26 ← 0 → 26	65 ← 0 → 65

XD8600U


Standard Lens (Aspect 4:3)

Image (XGA)			Distance from Screen				Default Height Projected Image (HO)		Movable V Position from Default Position			Movable H Position from Default Position			
Diagonal Size	Width	Height	Shortest (Wide)	Longest (Tele)	inches	m	H1	H2	H1	H2	W1	W1	W1	W1	
inch	cm	inch	cm	inch	m	inch	cm	inch	cm	inch	cm	inch	cm	inch	cm
40	102	32	81	24	61	-	88	2.2	0	0	12 ← 0 → 2	30 ← 0 → 6	3 ← 0 → 3	8 ← 0 → 8	
60	152	48	122	36	91	86	2.2	0	0	18 ← 0 → 3	46 ← 0 → 9	5 ← 0 → 5	12 ← 0 → 12		
80	203	64	163	48	122	86	3.0	0	0	24 ← 0 → 4	61 ← 0 → 11	6 ← 0 → 6	16 ← 0 → 16		
100	254	80	203	60	152	108	2.7	148	3.8	0	0	30 ← 0 → 6	76 ← 0 → 14	8 ← 0 → 8	20 ← 0 → 20
150	381	120	305	90	229	208	3.5	189	4.8	0	0	45 ← 0 → 8	114 ← 0 → 21	12 ← 0 → 12	30 ← 0 → 30
200	508	160	406	120	305	219	4.2	228	5.8	0	0	60 ← 0 → 11	152 ← 0 → 28	16 ← 0 → 16	41 ← 0 → 41
250	635	200	508	150	381	275	7.0	-	-	0	0	75 ← 0 → 14	191 ← 0 → 36	20 ← 0 → 20	51 ← 0 → 51
300	762	240	610	180	457	331	8.4	-	-	0	0	90 ← 0 → 17	229 ← 0 → 43	24 ← 0 → 24	61 ← 0 → 61

OL-XD2000LZ (Aspect 4:3)




Image (XGA)			Distance from Screen				Default Height Projected Image (HO)		Movable V Position from Default Position		
-------------	--	--	----------------------	--	--	--	-------------------------------------	--	--	--	--

Connection Terminals

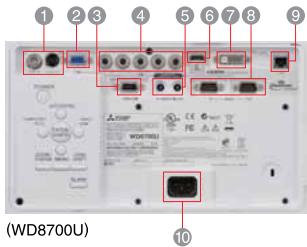

- ① S-Video/Video
- ② PC/Component video input-1
- ③ Remote-1
- ④ PC/Component video input-2
- ⑤ Remote-2 (I/O)
- ⑥ HDMI
- ⑦ DVI-D
- ⑧ Serial RS-232C (I/O)
- ⑨ LAN (RJ-45)
- ⑩ Power in (3-pin with earth terminal)

Dimensions (unit: mm)

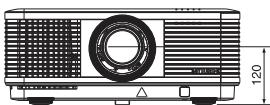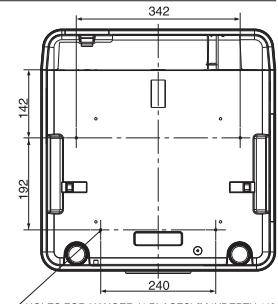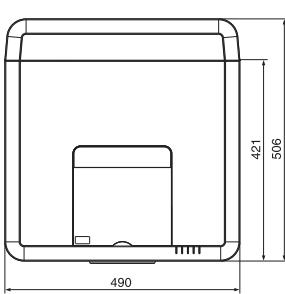

*The lens focal point is the default set at the time of shipment from the factory.

Specifications

Model	UD8900U	UD8850U	WD8700U	XD8600U								
Display technology	0.67" 1-Chip DMD	0.67" 1-Chip DMD	0.65" 1-Chip DMD	0.7" 1-Chip DMD								
Resolution	1920 × 1200 (Total 2,304,000 pixels)	1920 × 1200 (Total 2,304,000 pixels)	1280 × 800 (Total 1,024,000 pixels)	1024 × 768 (Total 786,432 pixels)								
Brightness	Dual lamp: 7500 lm Single lamp: 3750 lm	Dual lamp: 7500 lm Single lamp: 3750 lm	Dual lamp: 7300 lm Single lamp: 3650 lm	Dual lamp: 8500 lm Single lamp: 4250 lm								
Contrast ratio	2800 : 1 (on/off)											
Projection lens	f=24.5-33.1mm, F=2.0-2.4											
Zoom / Focus	Powered focus / zoom (zoom ratio 1.35 : 1)											
Picture size	40"-300"											
Source lamp	<table border="1"> <tr> <th>Lamp mode</th> <th>Lamp service life</th> </tr> <tr> <td>Dual (350W × 2)</td> <td>Normal: 2,000 hours Low: 4,000 hours</td> </tr> </table>	Lamp mode	Lamp service life	Dual (350W × 2)	Normal: 2,000 hours Low: 4,000 hours	<table border="1"> <tr> <th>Lamp mode</th> <th>Lamp service life</th> </tr> <tr> <td>Single (350W × 1)</td> <td>Normal: 4,000 hours* Low: 8,000 hours*</td> </tr> </table>	Lamp mode	Lamp service life	Single (350W × 1)	Normal: 4,000 hours* Low: 8,000 hours*	*When in Lamp Relay Mode.	
Lamp mode	Lamp service life											
Dual (350W × 2)	Normal: 2,000 hours Low: 4,000 hours											
Lamp mode	Lamp service life											
Single (350W × 1)	Normal: 4,000 hours* Low: 8,000 hours*											
Computer compatibility	Resolution: 640 × 400 - 1920 × 1200 True: 1920 × 1200, Sync-on-Green available	Resolution: 640 × 400 - 1920 × 1200 True: 1920 × 1200, Sync-on-Green available	Resolution: 640 × 400 - 1920 × 1200 True: 1280 × 800, Sync-on-Green available	Resolution: 640 × 400 - 1920 × 1200 True: 1024 × 768, Sync-on-Green available								
Video compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p 50/60Hz), 1080i (1125i 50/60Hz), 1080p (1125p 50/60Hz) SCART (RGB + 1V sync, only mini D-sub 15-pin Terminal)											
Input terminals	PC: 5 BNC × 1, mini D-sub 15-pin × 1, DVI-D (with HDCP) × 1 Video: BNC × 1, S-Video (4-pin) × 1, HDMI (Ver 1.3, Deep Color) × 1 3G-SDI × 1 (UD8900U only)											
Communication terminals	LAN (RJ-45): × 1 (projector control), SERIAL (in): D-sub 9-pin (male) × 1 (direct command is available.), SERIAL (out): D-sub 9-pin (male) × 1 (direct command is available.) Wired remote (in): × 1 (φ3.5mm stereo mini jack), Wired remote (out): × 1 (φ3.5mm stereo mini jack), Remote: D-sub 9-pin (female) × 1											
Dimensions (W × H × D)	490 × 201 × 421mm / 19.3 × 7.9 × 16.6 inch (exclude detachable terminal cover and protrusion)											
Weight	16.0kg / 35.3 lbs (exclude detachable terminal cover)											
Power supply	AC 100 - 240V, 50/60Hz											



for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.



Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

MITSUBISHI
ELECTRIC

PRESNTATION PRODUCTS