

Seattle X22N

Specifications



BRIGHTNESS

2200 Lumens (Standard)

1650 Lumens (Economy)

RESOLUTION

1024x768 XGA (Native)

1600x1200 UXGA (Compatible)

DISPLAY TYPE

0.63" LCD w/ MLA x 3

CONTRAST RATIO

500 :1

ASPECT RATIO

4:3 Native

16:9 Compatible

THROW RATIO

1.45 ~ 1.73 (x screen width)

PROJECTION LENS

Manual Zoom & Focus

ZOOM RATIO

1.2:1

DIAGONAL IMAGE SIZE

40" - 300"

THROW DISTANCE

3.33' - 25' Feet

KEystone

+/- 30° Vertical

LAMP

200 watt UHP

LAMP LIFE

3000 (Standard)

5000 (Economy)

INPUTS

VGA

DVI-I

Composite

S-Video

Component RCA Audio (R/L)

Audio x 2 (3.5mm)

OUTPUTS

VGA

Audio (3.5mm)

PROJECTOR CONTROLS

USB

RS232 (9-pin)

RJ45 LAN Connection

COMPATIBILITY

VGA, SVGA, XGA, SXGA, UXGA, Mac

EDTV / SDTV / HDTV

480i/p, 576i/p, 720p, 1080i

FCC CERTIFICATION

FCC-B, UL, cUL, TUV, CD, CE, CCC

VIDEO COMPATIBILITY

NTSC, NTSC 4.43, PAL M/N 60, SECAM

AUDIO

1 x 8w Mono Speaker

DECIBEL RATING

33 dB (standard) / 30 dB (economy)

H-REFRESH RATE

31-92 kHz

V-REFRESH RATE

48-120 Hz

POWER SUPPLY

AC 110 ~ 240 Volts

50-60Hz (auto ranging)

POWER CONSUMPTION

285 Watts (standard)

<5w standby

DIMENSIONS (WxDxH)

12.8" x 10.24" x 3.8" Inches

WEIGHT

7.3 Lbs

WARRANTY

3 year parts & labor / 90 day lamp



Special features of the Seattle X22N include:

LAN Connectivity— For network installation. Manage your projectors through a web-based platform.

Quick Start Up and Shut Down— Start presenting quickly and only a 10 second cool down cycle when you finish!

Side Changing Lamp and Filter— Easy lamp installation and projector maintenance. No need to remove the projector from ceiling mount position.

Throw Distance (ft)

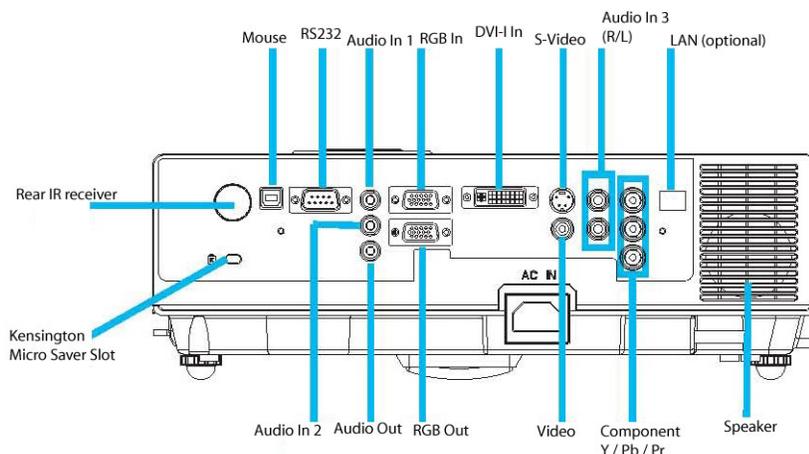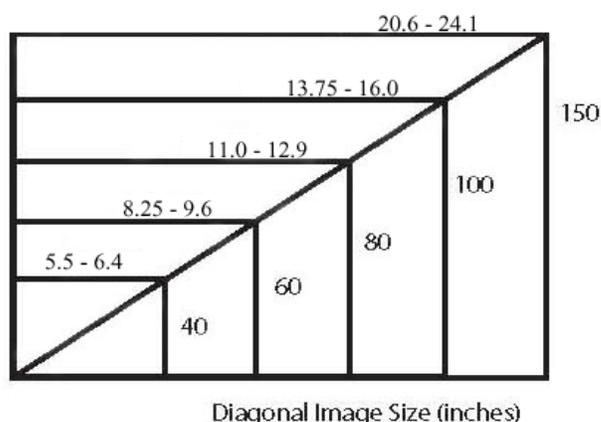

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

www.boxlight.com
800.762.5757
International 360.779.7901